



Cable Layout: ⑤

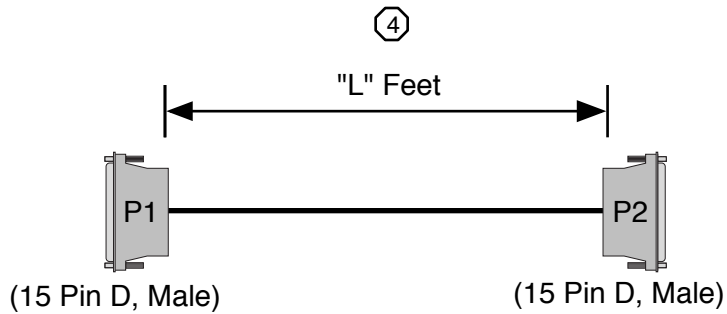

Wiring Information: ⑤

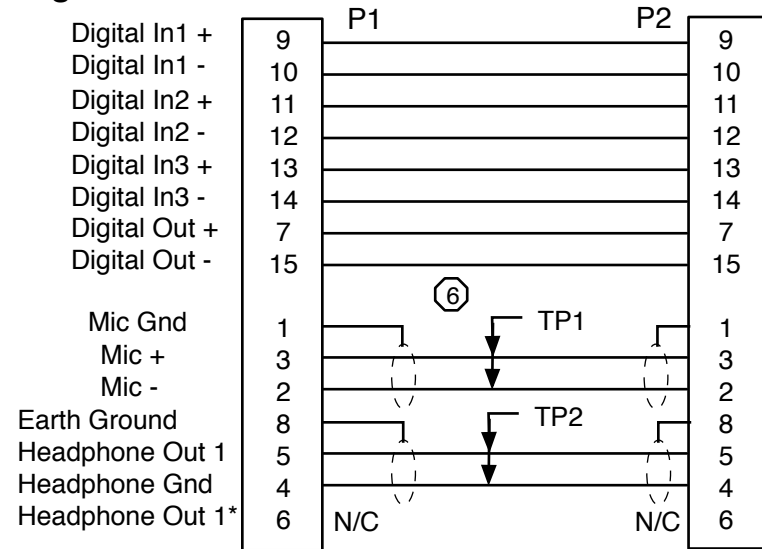


Parts List:

| Item | Qty | Reference | P/N | Mfg | Description | Notes |
|------|-----|-----------|----------|----------|---------------------|-------|
| 1 | 1 | P1, P2 | XXX-XXXX | XXXXXXXX | 15-pin Male D-shell | 1 |
| 2 | AR | - | | | Audio Cable | 3 |
| 3 | | | | | | |
| 4 | | | | | | |

Notes:

- ① Use high quality supplier such as AMP or equivalent.
- ② (Not Used)
- ③ Use low capacitance, shielded, twisted pair, high flex audio cable.
- ④ Cable length "L" defined by length field of part number ordered
- ⑤ Wiring and cable layout as shown.
- ⑥ Individually shielded twisted pair configuration as shown. Straight or twisted pair cable may be used for Digital I/O Connections.

| Rev | Date | Originator | Description |
|-----|---------|------------|-------------------------|
| - | 5-5-04 | JPM | original release |
| 02 | 4-14-09 | CJA | Added information table |
| | | | |
| | | | |

| | |
|--|-----------------------------|
|  ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com | |
| Cage Code | OVFW3 |
| Title | Audio Cable, IRIS Extension |
| Dwg # | CA-D15M-D15M-L-A_02 |
| Sheet | 1 of 1 |

| Industry connector Sub Group | ASTi Part Number Sub Group | Source Device | ASTi Part Number | Current Revision Number | Description & Case Use | Special Notes |
|------------------------------|----------------------------|---------------|------------------|-------------------------|------------------------|---------------|
| DB15 | D15* | ACU, ACU2 | CA-D15M-D15M-L-A | 02 | | |