



Cable Layout:

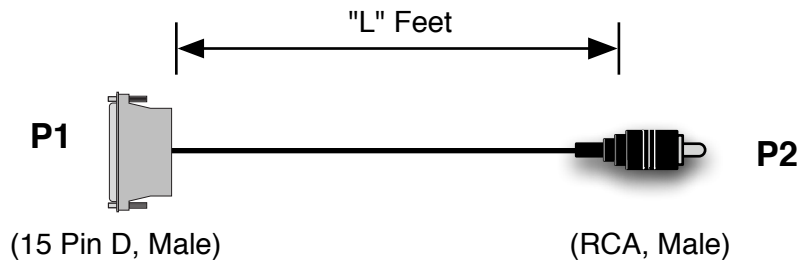

CA-D15M-R2M-L-A_04

Length in Feet


Wiring Information:

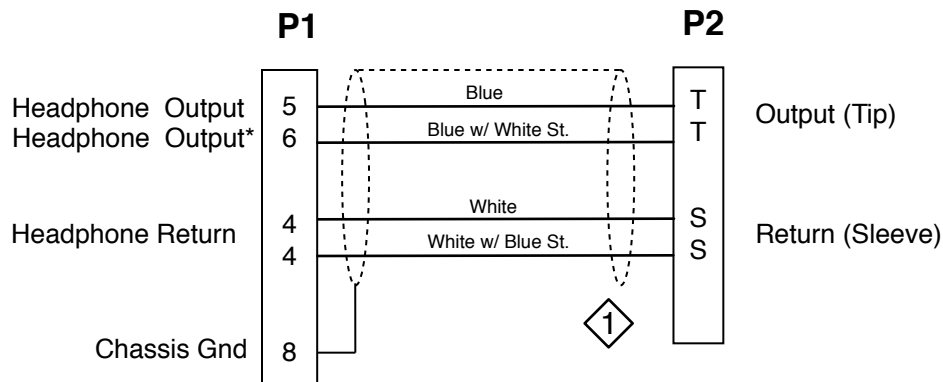

Notes:

1. Float shield connection at RCA end of cable
2. 15 pin DB-15 connector: Use high quality supplier such as AMP or equivalent.
3. Male RCA connector. Use Canare F-09
4. Use low capacitance, shielded, star quad, high flex audio cable, Belden 1192A.
5. Wiring and cable layout as shown.

Rev	Date	Originator	Description
01	5-5-04	JPM	original release
02	3-9-05	NAK	Changed cable type
03	10-10-07	NAK	Changed connector style. Added connection to Pin 4
04	4-14-09	CJA	Added information table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVFW3
Title	Audio Cable, IRIS to Phono Plug
Dwg #	CA-D15M-R2M-L-A_04
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-R2M-L-A	04		