



### Cable Layout:

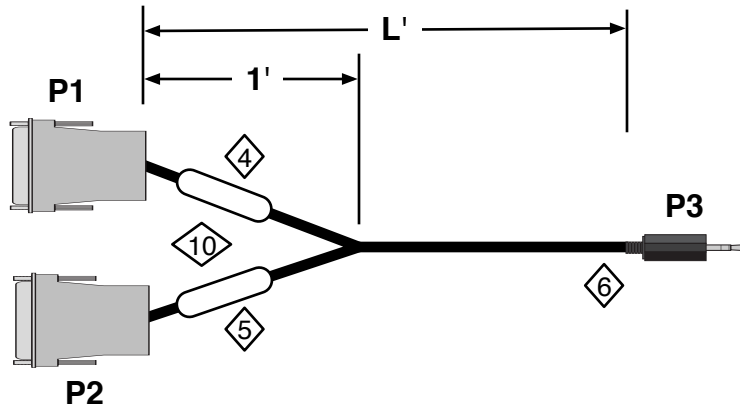


**CA-D9M-D9M-Y-P3M-L\_02**

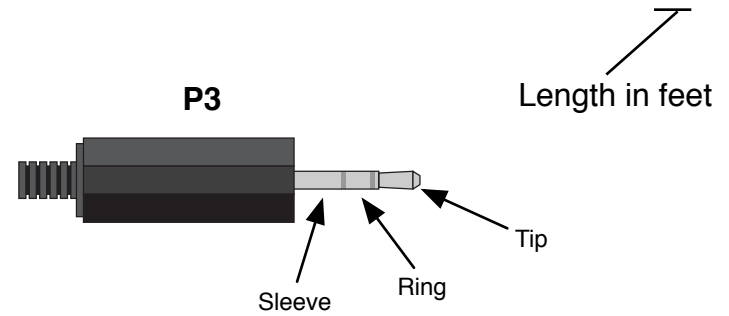


### NOTES

1. P1 & P2: 9pin D-Sub male connectors with thumb screws. Apply strain relief.
2. P3: 3.5mm stereo in-line jack plug
3. Use twisted pair audio cable: Canare MR202-4AT
4. Apply label "Left" with clear heatshrink
5. Apply label "Right" with clear heatshrink
6. Float all shields at P3 connector end
7. Tie all shields to chassis ground pin of D-Sub connectors as indicated
8. Apply black flex-braid sleeving to all legs of the cable with heatshrink at the cable split

### Wiring Information:

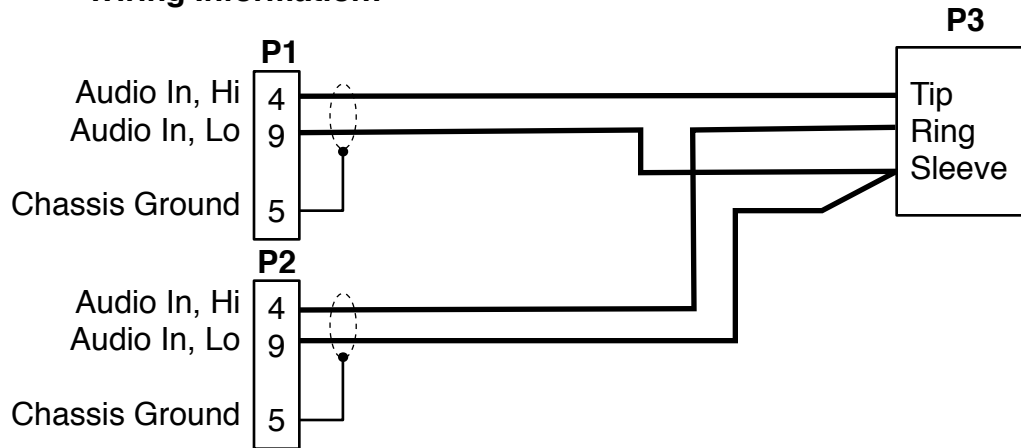

Rev	Date	Originator	Description
01	11/13/06	NKW	Original Release
02	4/1/09	CJA	Added Information Table

 <b>ADVANCED SIMULATION TECHNOLOGY inc.</b> 500A Huntmar Park Drive, Herndon, VA 20170 <a href="http://www.asti-usa.com">www.asti-usa.com</a>	
Cage Code	OVPW3
Title	Audio Cable - Stereo PC out to 2 RIU input channels
Dwg #	CA-D9M-D9M-Y-P3M-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-D9M-Y-P3M-L-A	02		